



Version Information

Version	Release Date	Notes
1	02/17	Initial release

Welcome to Atlona!

Thank you for purchasing this Atlona product. We hope you enjoy it and will take a extra few moments to register your new purchase.

Registration only takes a few minutes and protects this product against theft or loss. In addition, you will receive notifications of product updates and firmware. Atlona product registration is voluntary and failure to register will not affect the product warranty.

To register your product, go to <http://www.atlona.com/registration>

Sales, Marketing, and Customer Support

Main Office

Atlona Incorporated
70 Daggett Drive
San Jose, CA 95134
United States

Office: +1.877.536.3976 (US Toll-free)
Office: +1.408.962.0515 (US/International)

Sales and Customer Service Hours
Monday - Friday: 6:00 a.m. - 4:30 p.m. (PST)

<http://www.atlona.com/>

International Headquarters

Atlona International AG
Ringstrasse 15a
8600 Dübendorf
Switzerland

Office: +41 43 508 4321

Sales and Customer Service Hours
Monday - Friday: 09:00 - 17:00 (UTC +1)

Operating Notes



IMPORTANT: Visit <http://www.atlona.com/product/AT-ETU-SYNC> for the latest firmware updates and User Manual.

EDID Emulator for 4K HDR HDMI Signals is a trademark of Atlona, Inc.

©2017 Atlona, Inc. All Rights Reserved. All trademarks are the property of their respective owners.
Atlona reserves the right to make changes to the hardware, packaging, and documentation without notice.

Atlona, Inc. (“Atlona”) Limited Product Warranty

Coverage

Atlona warrants its products will substantially perform to their published specifications and will be free from defects in materials and workmanship under normal use, conditions and service.

Under its Limited Product Warranty, Atlona, at its sole discretion, will either:

- repair or facilitate the repair of defective products within a reasonable period of time, restore products to their proper operating condition and return defective products free of any charge for necessary parts, labor and shipping.

OR

- replace and return, free of charge, any defective products with direct replacement or with similar products deemed by Atlona to perform substantially the same function as the original products.

OR

- refund the pro-rated value based on the remaining term of the warranty period, not to exceed MSRP, in cases where products are beyond repair and/or no direct or substantially similar replacement products exist.

Repair, replacement or refund of Atlona products is the purchaser’s exclusive remedy and Atlona liability does not extend to any other damages, incidental, consequential or otherwise.

This Limited Product Warranty extends to the original end-user purchaser of Atlona products and is non-transferrable to any subsequent purchaser(s) or owner(s) of these products.

Coverage Periods

Atlona Limited Product Warranty Period begins on the date of purchase by the end-purchaser. The date contained on the end-purchaser’s sales or delivery receipt is the proof purchase date.

Limited Product Warranty Terms – New Products

- 10 years from proof of purchase date for hardware/electronics products purchased on or after June 1, 2013.
- 3 years from proof of purchase date for hardware/electronics products purchased before June 1, 2013.
- Lifetime Limited Product Warranty for all cable products.

Limited Product Warranty Terms – Refurbished (B-Stock) Products

- 3 years from proof of purchase date for all Refurbished (B-Stock) hardware and electronic products purchased on or after June 1, 2013.

Remedy

Atlona recommends that end-purchasers contact their authorized Atlona dealer or reseller from whom they purchased their products. Atlona can also be contacted directly. Visit www.atlona.com for Atlona’s contact information and hours of operation. Atlona requires that a dated sales or delivery receipt from an authorized dealer, reseller or end-purchaser is provided before Atlona extends its warranty services. Additionally, a return merchandise authorization (RMA) and/or case number, is required to be obtained from Atlona in advance of returns.

Atlona requires that products returned are properly packed, preferably in the original carton, for shipping. Cartons not bearing a return authorization or case number will be refused. Atlona, at its sole discretion, reserves the right to reject any products received without advanced authorization. Authorizations can be requested by calling 1-877-536-3976 (US toll free) or 1-408- 962-0515 (US/international) or via Atlona’s website at www.atlona.com.

Exclusions

This Limited Product Warranty excludes:

- Damage, deterioration or malfunction caused by any alteration, modification, improper use, neglect, improper packaging or shipping (such claims must be presented to the carrier), lightning, power surges, or other acts of nature.

Atlona, Inc. (“Atlona”) Limited Product Warranty

- Damage, deterioration or malfunction resulting from the installation or removal of this product from any installation, any unauthorized tampering with this product, any repairs attempted by anyone unauthorized by Atlona to make such repairs, or any other cause which does not relate directly to a defect in materials and/or workmanship of this product.
- Equipment enclosures, cables, power supplies, batteries, LCD displays, and any accessories used in conjunction with the product(s).
- Products purchased from unauthorized distributors, dealers, resellers, auction websites and similar unauthorized channels of distribution.

Disclaimers

This Limited Product Warranty does not imply that the electronic components contained within Atlona’s products will not become obsolete nor does it imply Atlona products or their electronic components will remain compatible with any other current product, technology or any future products or technologies in which Atlona’s products may be used in conjunction with. Atlona, at its sole discretion, reserves the right not to extend its warranty offering in instances arising outside its normal course of business including, but not limited to, damage inflicted to its products from acts of god.

Limitation on Liability

The maximum liability of Atlona under this limited product warranty shall not exceed the original Atlona MSRP for its products. To the maximum extent permitted by law, Atlona is not responsible for the direct, special, incidental or consequential damages resulting from any breach of warranty or condition, or under any other legal theory. Some countries, districts or states do not allow the exclusion or limitation of relief, special, incidental, consequential or indirect damages, or the limitation of liability to specified amounts, so the above limitations or exclusions may not apply to you.

Exclusive Remedy

To the maximum extent permitted by law, this limited product warranty and the remedies set forth above are exclusive and in lieu of all other warranties, remedies and conditions, whether oral or written, express or implied. To the maximum extent permitted by law, Atlona specifically disclaims all implied warranties, including, without limitation, warranties of merchantability and fitness for a particular purpose. If Atlona cannot lawfully disclaim or exclude implied warranties under applicable law, then all implied warranties covering its products including warranties of merchantability and fitness for a particular purpose, shall provide to its products under applicable law. If any product to which this limited warranty applies is a “Consumer Product” under the Magnuson-Moss Warranty Act (15 U.S.C.A. §2301, ET SEQ.) or other applicable law, the foregoing disclaimer of implied warranties shall not apply, and all implied warranties on its products, including warranties of merchantability and fitness for the particular purpose, shall apply as provided under applicable law.

Other Conditions

Atlona’s Limited Product Warranty offering gives legal rights, and other rights may apply and vary from country to country or state to state. This limited warranty is void if (i) the label bearing the serial number of products have been removed or defaced, (ii) products are not purchased from an authorized Atlona dealer or reseller. A comprehensive list of Atlona’s authorized distributors, dealers and resellers can be found at www.atlona.com.

Important Safety Information



CAUTION: TO REDUCT THE RISK OF ELECTRIC SHOCK DO NOT OPEN ENCLOSURE OR EXPOSE TO RAIN OR MOISTURE. NO USER-SERVICEABLE PARTS INSIDE REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance instructions in the literature accompanying the product.




The information bubble is intended to alert the user to helpful or optional operational instructions in the literature accompanying the product.

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this product near water.
6. Clean only with a dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install or place this product near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of a polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the product.
11. Only use attachments/accessories specified by Atlona.
12. To reduce the risk of electric shock and/or damage to this product, never handle or touch this unit or power cord if your hands are wet or damp. Do not expose this product to rain or moisture.
13. Unplug this product during lightning storms or when unused for long periods of time.
14. Refer all servicing to qualified service personnel. Servicing is required when the product has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the product, the product has been exposed to rain or moisture, does not operate normally, or has been dropped.



FCC Statement

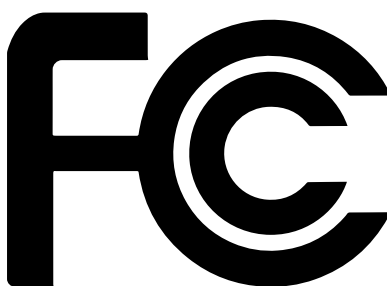

FCC Compliance and Advisory Statement: This hardware device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a commercial installation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed or used in accordance with the instructions, may cause harmful interference to radio communications. However there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: 1) reorient or relocate the receiving antenna; 2) increase the separation between the equipment and the receiver; 3) connect the equipment to an outlet on a circuit different from that to which the receiver is connected; 4) consult the dealer or an experienced radio/TV technician for help. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Where shielded interface cables have been provided with the product or specified additional components or accessories elsewhere defined to be used with the installation of the product, they must be used in order to ensure compliance with FCC regulations.

Table of Contents

Introduction	8
Features	8
Package Contents	8
Panel Description	9
Installation	10
Connection Diagram	10
Basic Operation	11
Selecting an EDID	11
Learning an EDID	12
Performing System Tests	14
In-Line Testing	14
Source Testing	16
Sink Testing	16
DDC Reclocking	16
Appendix	17
EDID Modes	17
Specifications	21
Index	23

Introduction

The Atlona Etude™ Sync (AT-ETU-SYNC) provides EDID emulation and Hot Plug Detect communication between HDMI® sink and source devices. It detects and corrects for signal integrity issues associated with cabling or connections, and can resolve compatibility problems between a source and sink. The Etude Sync is compatible with high dynamic range (HDR) formats and is HDCP 2.2 compliant. It supports 4K/UHD video @ 60 Hz with 4:4:4 chroma sampling, as well as HDMI data rates up to 18 Gbps. In addition to addressing HDMI signal and device-related issues, the Etude Sync reports HDCP compliance at the source and destination, and can manage EDID communication with the source. This device is ideal for AV system troubleshooting as well as ensuring reliable, consistent performance.

The Etude Sync is for residential and commercial applications with the latest as well as emerging 4K/UHD and HDR sources and displays. It is compatible with all video resolutions, audio formats, and color space formats supported in the HDMI 2.0a specification, plus the ability to pass metadata for HDR content. The Etude Sync includes Atlona's award-winning 10-year limited product warranty and customer support services, so that integrators can specify, purchase, and install with confidence.



Features

- 4K/UHD capability @ 60 Hz with 4:4:4 chroma sampling, plus support for HDR (High Dynamic Range) formats
- Supports video, audio, and color space formats in the HDMI 2.0a specification
- HDCP 2.2 and 1.4
- LPCM 7.1 audio, Dolby® Digital, Dolby Digital Plus, Dolby Atmos®, Dolby TrueHD, DTS:X™, and DTS-HD Master Audio™
- 3D pass through
- 10 EDID modes
- Allows “learning” of EDID from a sink device
- Essential tool for testing and troubleshooting connectivity issues in any system
- Front-panel indicators provide power and signal status information for +5 volt source supply, hot plug detect, and HDCP
- Restores +5 volt and HPD signals
- Compact and portable

Package Contents

- 1 x AT-ETU-SYNC
- 1 x Wall/table mount ears
- 1 x USB to mini-USB power cable
- 1 x Installation Guide

Panel Description

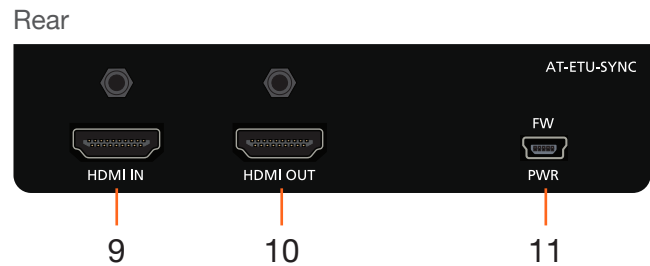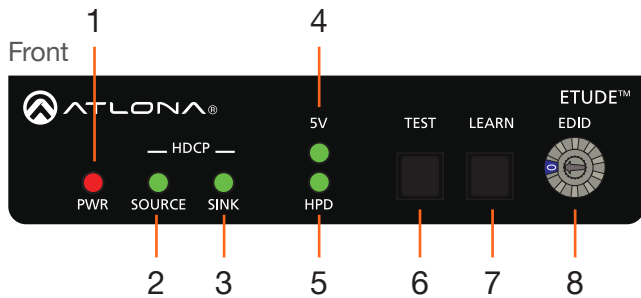

- | | |
|---|--|
| <p>1 PWR
Glowes red when the unit is powered.</p> <p>2 SOURCE
Indicates the source status. Refer to Performing System Tests (page 14) for more information.</p> <p>3 SINK
Indicates the sink status. Refer to Performing System Tests (page 14) for more information.</p> <p>5V
Reports the status of the 5V signal from the source device. Refer to Performing System Tests (page 14) for more information.</p> <p>HPD
Reports the Hot-Plug Detect (HPD) status from the sink device. Refer to Performing System Tests (page 14) for more information.</p> <p>TEST
Press this button to begin the test procedure. Refer to Performing System Tests (page 14) for more information.</p> | <p>4 LEARN
This LED indicator will glow bright green when the switcher is powered. Refer to Learning an EDID (page 12) for more information.</p> <p>5 EDID
Turn this dial to select the desired EDID mode. Refer to Selecting an EDID (page 11) for more information.</p> <p>6 HDMI IN
Connect an HDMI cable from the source to this port.</p> <p>7 HDMI OUT
Connect an HDMI cable from the sink (display) to this port.</p> <p>8 FW / PWR
Connect the included USB cable to this port. This port is used to power the AT-ETU-SYNC and to update firmware. As of this writing, no firmware updates are available.</p> |
|---|--|

Installation

1. Connect an HDMI cable from the source to the **HDMI IN** port on the AT-ETU-SYNC.
2. Connect an HDMI cable from the sink (display) to the **HDMI OUT** port on the AT-ETU-SYNC.




IMPORTANT: The AT-ETU-SYNC is a High Dynamic Range (HDR) device. For best performance, use premium HDMI cables that are HDR-certified. The HDMI cable between the AT-ETU-SYNC and the display (sink) and the should not exceed 15 feet (4.5 meters).

3. Connect the included 5V DC power supply to the **FW / PWR** port on the AT-ETU-SYNC.
4. Connect the 5V DC power supply to an available AC outlet.

Connection Diagram

The illustration below, shows the proper location of the AT-ETU-SYNC in a basic source-sink setup. The location of the AT-ETU-SYNC will vary, depending on the system. Before using the AT-ETU-SYNC as an EDID emulator, an EDID must be selected or learned. Refer to [Selecting an EDID \(page 11\)](#) and [Learning an EDID \(page 12\)](#) for more information.

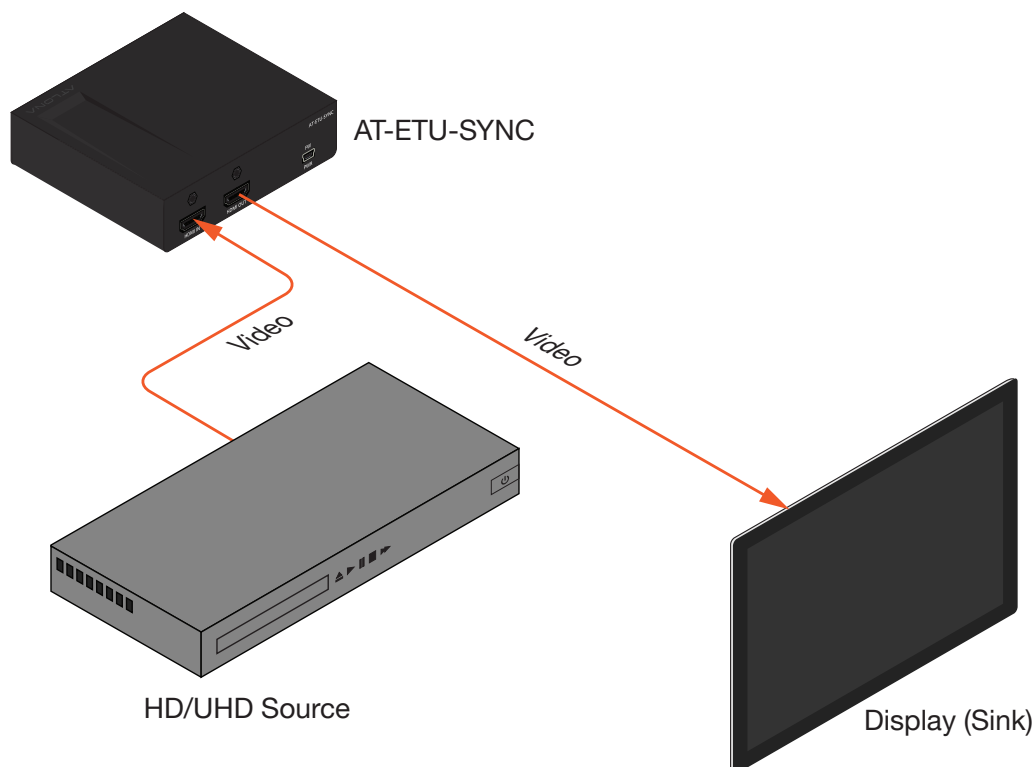


Basic Operation

Selecting an EDID

The AT-ETU-SYNC includes 10 EDID modes, which can be selected using the **EDID** dial. Refer to [EDID Modes \(page 17\)](#), for details on supported features for each EDID mode.

Mode	Description	Mode	Description
0	Learn mode	5	4K 60 4:2:0 / multichannel (HD lossless)
1	1080p 3D / 2 channel	6	4K 60 4:2:0 HDR / 2 channel
2	1080p 3D / multichannel (lossless)	7	4K 60 4:2:0 HDR / multichannel (HD lossless)
3	1080p DVI	8	4K 60 4:4:4 8-bit / 2 channel
4	4K 60 4:2:0 / 2 channel	9	4K 60 4:4:4 8-bit / multichannel (HD lossless)

1. Power the AT-ETU-SYNC.
2. Rotate the **EDID** dial to the desired EDID mode (0 - 9). Refer to the table above for a listing of available EDID modes.

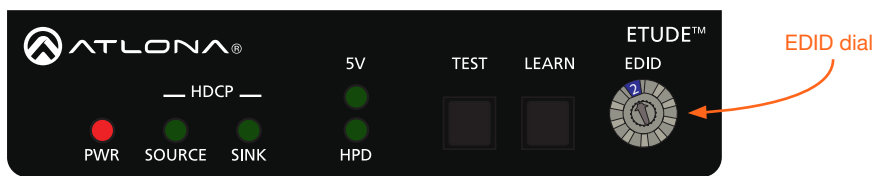

IMPORTANT: By default, EDID mode 0 is blank. If an EDID has not been saved to mode 0, then refer to [Learning an EDID \(page 12\)](#) for information.


3. Connect an HDMI cable from the display to the **HDMI OUT** port on the AT-ETU-SYNC.
4. Connect another HDMI cable from the source to the **HDMI IN** port on the AT-ETU-SYNC.
5. Connect the 5V DC power supply between the **FW / USB** port, on the AT-ETU-SYNC, and an available AC outlet.
6. Power the source.
7. Power the sink device.
8. The source will use the selected EDID mode when sending audio/video data to the sink device.

NOTE: The **EDID** dial can be set to any EDID mode, while the AT-ETU-SYNC is powered and connected to the system.


Learning an EDID

The AT-ETU-SYNC has the ability to learn the EDID from another device, using EDID mode 0. Once learned, the EDID data will be read by the source, providing all the necessary details of the type of signal that will be sent to the sink device.


1. Disconnect the AT-ETU-SYNC from the system.
2. Power the AT-ETU-SYNC.
3. Rotate the **EDID** dial to EDID mode 0, as shown.

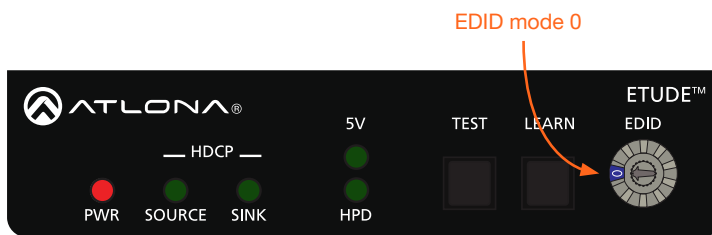

4. Connect an HDMI cable from the sink device to the **HDMI OUT** port on the AT-ETU-SYNC. Make sure that the sink device is powered-on.

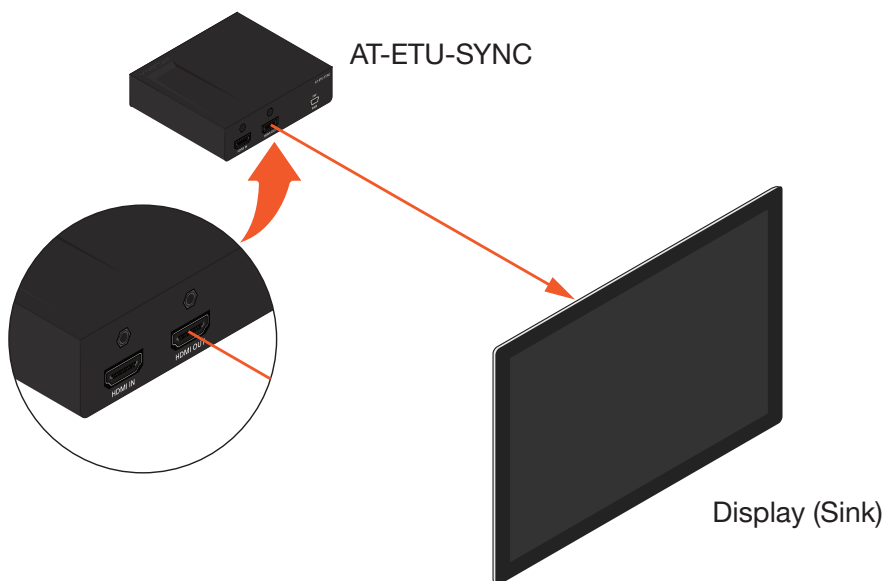


5. Press and hold the **LEARN** button on the AT-ETU-SYNC until the **HPD** light glows green.

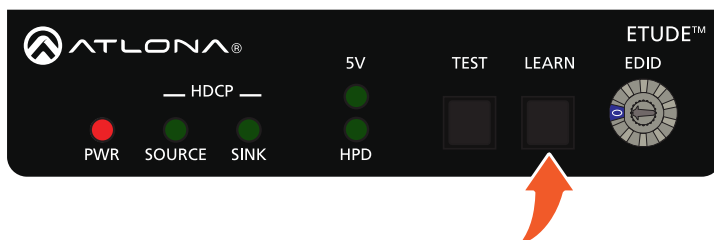

6. Release the **LEARN** button.



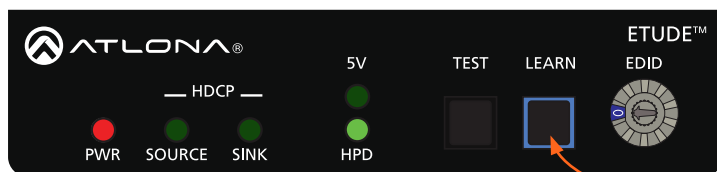


During the process, the **LEARN** button will flash blue as the EDID data is copied into memory.



Flashes blue while learning EDID

If the EDID was successfully learned, then the **LEARN** button will turn off. If an error was encountered during the operation, then the **LEARN** button will flash red.

If an error is encountered, disconnect the power from the AT-ETU-SYNC, power-cycle the sink device, then repeat steps 4 through 6. If after several attempts, the error is encountered, then this may indicate that the sink device has a bad or corrupt EDID.

LED/Button	State		Description
LEARN	Flashing blue		EDID being learned.
	Off		EDID learned successfully.
	Flashing red		Error learned EDID. <ul style="list-style-type: none"> • Bad or corrupt EDID on sink. • No sink device present or detected. • Make sure sink is powered. • Check for proper connection between sink device and AT-ETU-SYNC. • Possible bad cable.
HPD	Solid green		Sink device OK.
	Off		Sink device not detected.

7. Reconnect the source (or other intermediate device) to the **HDMI IN** port on the AT-ETU-SYNC. The source will read the EDID data stored in EDID mode 0 and use this information to send the proper audio and video formats to the sink device.


NOTE: EDID data will remain in EDID mode 0, even after power is disconnected. To learn a new EDID and overwrite the existing EDID data in mode 0, repeat steps 1 through 6.

Performing System Tests


The AT-ETU-SYNC features a **TEST** button which tests the source, sink, or the entire system to aid in troubleshooting connectivity issues.

In-Line Testing


1. Power the AT-ETU-SYNC.
2. Position the AT-ETU-SYNC between the source and sink. The actual position of the AT-ETU-SYNC will depend upon the setup. In the illustration, below, an intermediate device (such as a switcher, splitter, or matrix) has been introduced. If no intermediate devices are present, then connect the AT-ETU-SYNC between the source and the display (sink).
 - Problem is suspected between the sink and any upstream devices:
 - a. Connect an HDMI cable from the intermediate device to the **HDMI IN** port on the AT-ETU-SYNC.
 - b. Connect an HDMI cable from the **HDMI OUT** port on the AT-ETU-SYNC to the display (sink).
 - If the problem is suspected between the source and the intermediate device(s):
 - a. Connect an HDMI cable from the source to the **HDMI IN** port on the AT-ETU-SYNC.
 - b. Connect an HDMI cable from the **HDMI OUT** port on the AT-ETU-SYNC to the intermediate device.

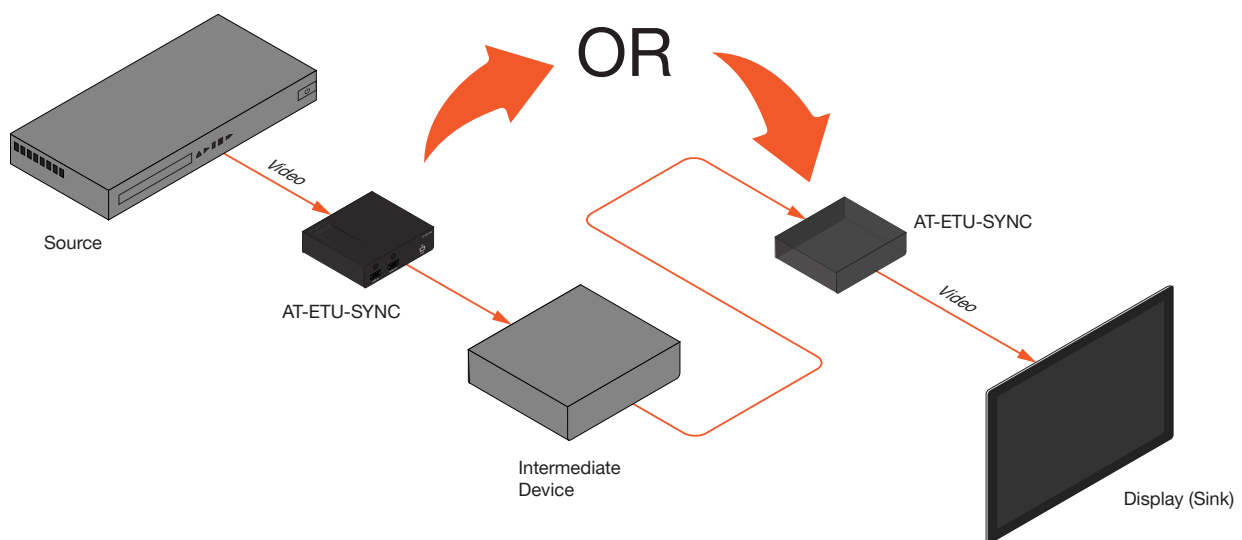



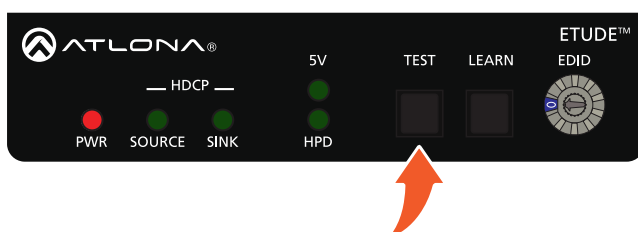



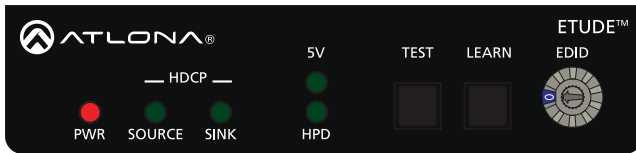




3. Press and release the **TEST** button on the front panel of the AT-ETU-SYNC.



4. The **SOURCE**, **SINK**, **5V**, and **HPD** indicators will display the current testing results. Refer to the table, below.



LED	State		Description
SOURCE	Solid green		Source is HDCP 2.2
	Flashing green		Source is HDCP 1.4
	Solid red		The source is not HDCP-compliant
SINK	Solid green		Sink is HDCP 2.2
	Flashing green		Sink is HDCP 1.4
	Solid red		Sink is not HDCP-compliant
5V	Solid red		5V signal from the source is not detected
	Solid green		5V signal from the source is present
	Off		No source device is detected <ul style="list-style-type: none"> • Check that a source device is connected • Verify the integrity of the HDMI cable connected to the source device
HDP	Solid red		HDP is low. The AT-ETU-SYNC will generate the
	Off		No sink device is detected <ul style="list-style-type: none"> • Check that a sink device is connected • Verify the integrity of the HDMI cable connected to the sink

5. After the test procedure is complete all LED indicators, except for the **PWR** indicator, will turn off.

Source Testing

1. Power the AT-ETU-SYNC.
2. Connect an HDMI cable from the source to the **HDMI IN** port on the AT-ETU-SYNC.
3. Press and release the **TEST** button on the front panel of the AT-ETU-SYNC.
4. The **SOURCE** and **5V** indicators will display the testing results. Note that since a sink device is not present, the **HPD** and **SINK** indicators are ignored. Refer to the table on the previous page.

Sink Testing

1. Power the AT-ETU-SYNC.
2. Connect an HDMI cable from the sink to the **HDMI OUT** port on the AT-ETU-SYNC.
3. Press and release the **TEST** button on the front panel of the AT-ETU-SYNC.
4. The **SINK** and **HPD** indicators will display the testing results. Note that since a source device is not present, the **5V** and **SOURCE** indicators are ignored. Refer to the table on the previous page.



NOTE: When the EDID dial is set to EDID mode 0, during a test procedure, the **LEARN** button will glow blue. If the EDID dial is set to any other mode, then the **LEARN** button will remain “off”. Setting the EDID mode will not affect the results of the test procedure.

DDC Reclocking

DDC relocking, sometimes referred to as “clock stretching”, is method for correcting sync issues on the DDC line. The DDC line (also known as the I²C bus) is part of the HDMI interface and is responsible for transmitting EDID and HDCP information from the sink to the source. The DDC line contains two signal lanes: SDA (data) and SCL (clock). Most of the time, the timing between these two lanes is correct. However, lengthy cables and/or intermediate devices between the source and sink, can introduce synchronization problems between these two lanes. This can result in a variety of issues, such as flashing picture, drop-outs, artifacts, and incorrect resolution.

Placing the AT-ETU-SYNC in-line, between the source and sink, will usually correct these issues. Experimenting with the position of the AT-ETU-SYNC, within the system - particularly when intermediate devices are installed - may be necessary to obtain the correct results. If the problem persists, contact an Atlona Technical Support Engineer for assistance.



NOTE: Some HDMI devices do not support clock-stretching.

Appendix

EDID Modes

The AT-ETU-SYNC comes with ten EDID modes. Mode 0 is used to record an external EDID and modes 1 through 9 are pre-programmed. The details for each EDID mode are listed below.

EDID Mode	Supported Features
0	No data until learned
1	1920 x 1080p at 60Hz - HDTV (16:9, 1:1) [Native] (3D support) 1280 x 720p at 60Hz - HDTV (16:9, 1:1) (3D support) 1920 x 1080i at 30Hz - HDTV (16:9, 1:1) (3D support) 720 x 480p at 60Hz - EDTV (16:9, 32:27) 1920 x 1080p at 24Hz - HDTV (16:9, 1:1) (3D support) 1920 x 1080p at 30Hz - HDTV (16:9, 1:1) (3D support) 640 x 480i at 30Hz - SDTV (16:9, 1:1) YCbCr 4:4:4, YCbCr 4:2:2 Top-Bottom, Side-by-Side LPCM 2-channel, 16/20/24 bit depths at 44/48/96/192 kHz FL/FR
2	1920 x 1080p at 60Hz - HDTV (16:9, 1:1) [Native] (3D support) 1280 x 720p at 60Hz - HDTV (16:9, 1:1) (3D support) 1920 x 1080i at 60Hz - HDTV (16:9, 1:1) (3D support) 720 x 480p at 60Hz - EDTV (16:9, 32:27) 1920 x 1080p at 24Hz - HDTV (16:9, 1:1) (3D support) 1920 x 1080p at 30Hz - HDTV (16:9, 1:1) (3D support) YCbCr 4:4:4, YCbCr 4:2:2 Top-Bottom, Side-by-Side LPCM 2-channel, 16/20/24 bit depths at 32/44/48/88/96/176/192 kHz LPCM 6-channel, 16/20/24 bit depths at 32/44/48/88/96/176/192 kHz LPCM 8-channel, 16/20/24 bit depths at 32/44/48/88/96/176/192 kHz AC-3 6-channel, 680k max. bit rate at 32/44/48 kHz DTS 6-channel, 1536k max. bit rate at 32/44/48/88/96 kHz DD+ 8-channel at 32/44/48 kHz DVD-A 8-channel at 48/96/192 kHz DTS-HD 8-channel, 16-bit at 44/48/88/96/176/192 kHz FL/FR, FLFE, FC, RL/RR, RC, RLC/RRC
3	1920 x 1080p at 60Hz - VESA STD [Native] 720 x 400p at 70Hz - IBM VGA 640 x 480p at 60Hz - IBM VGA 800 x 600p at 60Hz - VESA 1024 x 768p at 60Hz - VESA 1280 x 720p at 60Hz - VESA STD 1280 x 960p at 60Hz - VESA STD 1280 x 1024p at 60Hz - VESA STD 1440 x 900p at 60Hz - VESA STD 1600 x 1200p at 60Hz - VESA STD 1680 x 1050p at 60Hz - VESA STD
4	3840 x 2160p at 60Hz (16:9) [Native] 1920 x 1080p at 60Hz - HDTV (16:9, 1:1) 1920 x 1080p at 50Hz - HDTV (16:9, 1:1) 1920 x 1080i at 60Hz - HDTV (16:9, 1:1) 1920 x 1080i at 50Hz - HDTV (16:9, 1:1) 1920 x 1080p at 24Hz - HDTV (16:9, 1:1)

EDID Mode	Supported Features
4 (continued)	<p>1920 x 1080p at 25Hz - HDTV (16:9, 1:1) 1920 x 1080p at 30Hz - HDTV (16:9, 1:1) 1280 x 720p at 60Hz - HDTV (16:9, 1:1) 1280 x 720p at 50Hz - HDTV (16:9, 1:1) 720 x 480p at 60Hz - EDTV (16:9, 32:27) 720 x 576p at 50Hz - EDTV (16:9, 64:45) 720 x 480i at 60Hz - Doublescan (16:9, 32:27) 720 x 576i at 50Hz - Doublescan (16:9, 64:45) YCbCr 4:4:4, YCbCr 4:2:2 LPCM 2-channel, 16/20/24 bit depths at 44/48/96/192 kHz FL/FR</p>
5	<p>3840 x 2160p at 60Hz (16:9) [Native] 1920 x 1080p at 60Hz - HDTV (16:9, 1:1) 1920 x 1080p at 50Hz - HDTV (16:9, 1:1) 1920 x 1080i at 60Hz - HDTV (16:9, 1:1) 1920 x 1080i at 50Hz - HDTV (16:9, 1:1) 1920 x 1080p at 24Hz - HDTV (16:9, 1:1) 1920 x 1080p at 25Hz - HDTV (16:9, 1:1) 1920 x 1080p at 30Hz - HDTV (16:9, 1:1) 1280 x 720p at 60Hz - HDTV (16:9, 1:1) 1280 x 720p at 50Hz - HDTV (16:9, 1:1) 720 x 480p at 60Hz - EDTV (16:9, 32:27) 720 x 576p at 50Hz - EDTV (16:9, 64:45) 720 x 480i at 60Hz - Doublescan (16:9, 32:27) 720 x 576i at 50Hz - Doublescan (16:9, 64:45) YCbCr 4:4:4, YCbCr 4:2:2 LPCM 2-channel, 16/20/24 bit depths at 32/44/48/88/96/176/192 kHz LPCM 6-channel, 16/20/24 bit depths at 32/44/48/88/96/176/192 kHz LPCM 8-channel, 16/20/24 bit depths at 32/44/48/88/96/176/192 kHz AC-3 6-channel, 640k max. bit rate at 32/44/48 kHz DTS 6-channel, 1536k max. bit rate at 44/48/88/96 kHz DD+ 8-channel at 44/48 kHz DVD-A 8-channel at 48/96/192 kHz DTS-HD 8-channel, 16-bit at 44/48/88/96/176/192 kHz FL/FR, FLFE, FC, RL/RR, RLC/RRC</p>
6	<p>3840 x 2160p at 60Hz (16:9) [Native] 1920 x 1080p at 60Hz - HDTV (16:9, 1:1) 1920 x 1080p at 50Hz - HDTV (16:9, 1:1) 1920 x 1080i at 60Hz - HDTV (16:9, 1:1) 1920 x 1080i at 50Hz - HDTV (16:9, 1:1) 1920 x 1080p at 24Hz - HDTV (16:9, 1:1) 1920 x 1080p at 25Hz - HDTV (16:9, 1:1) 1920 x 1080p at 30Hz - HDTV (16:9, 1:1) 1280 x 720p at 60Hz - HDTV (16:9, 1:1) 1280 x 720p at 50Hz - HDTV (16:9, 1:1) 720 x 480p at 60Hz - EDTV (16:9, 32:27) 720 x 576p at 50Hz - EDTV (16:9, 64:45) 720 x 480i at 60Hz - Doublescan (16:9, 32:27) 720 x 576i at 50Hz - Doublescan (16:9, 64:45) YCbCr 4:4:4, YCbCr 4:2:2 LPCM 2-channel, 16/20/24 bit depths at 44/48/96/192 kHz FL/FR</p>

EDID Mode	Supported Features
7	<p>3840 x 2160p at 60Hz (16:9) [Native] 1920 x 1080p at 60Hz - HDTV (16:9, 1:1) 1920 x 1080p at 50Hz - HDTV (16:9, 1:1) 1920 x 1080i at 60Hz - HDTV (16:9, 1:1) 1920 x 1080i at 50Hz - HDTV (16:9, 1:1) 1920 x 1080p at 24Hz - HDTV (16:9, 1:1) 1920 x 1080p at 25Hz - HDTV (16:9, 1:1) 1920 x 1080p at 30Hz - HDTV (16:9, 1:1) 1280 x 720p at 60Hz - HDTV (16:9, 1:1) 1280 x 720p at 50Hz - HDTV (16:9, 1:1) 720 x 480p at 60Hz - EDTV (16:9, 32:27) 720 x 576p at 50Hz - EDTV (16:9, 64:45) 720 x 480i at 60Hz - Doublescan (16:9, 32:27) 720 x 576i at 50Hz - Doublescan (16:9, 64:45) YCbCr 4:4:4, YCbCr 4:2:2 LPCM 2-channel, 16/20/24 bit depths at 32/44/48/88/96/176/192 kHz LPCM 6-channel, 16/20/24 bit depths at 44/48/88/96/176/192 kHz LPCM 8-channel, 16/20/24 bit depths at 32/44/48/88/96/176/192 kHz AC-3 6-channel, 640k max. bit rate at 32/44/48 kHz DTS 6-channel, 1536k max. bit rate at 44/48/88/96 kHz DD+ 8-channel at 44/48 kHz DTS-HD 8-channel, 16-bit at 44/48/88/96/176/192 kHz FL/FR, FLFE, FC, RL/RR, RLC/RRC</p>
8	<p>3840 x 2160p at 60Hz (16:9) [Native] 1920 x 1080p at 60Hz - HDTV (16:9, 1:1) 1920 x 1080p at 50Hz - HDTV (16:9, 1:1) 1920 x 1080i at 60Hz - HDTV (16:9, 1:1) 1920 x 1080i at 50Hz - HDTV (16:9, 1:1) 1920 x 1080p at 24Hz - HDTV (16:9, 1:1) 1920 x 1080p at 25Hz - HDTV (16:9, 1:1) 1920 x 1080p at 30Hz - HDTV (16:9, 1:1) 1280 x 720p at 60Hz - HDTV (16:9, 1:1) 1280 x 720p at 50Hz - HDTV (16:9, 1:1) 720 x 480p at 60Hz - EDTV (16:9, 32:27) 720 x 576p at 50Hz - EDTV (16:9, 64:45) 720 x 480i at 60Hz - Doublescan (16:9, 32:27) 720 x 576i at 50Hz - Doublescan (16:9, 64:45) YCbCr 4:4:4, YCbCr 4:2:2 LPCM 2-channel, 16/20/24 bit depths at 44/48/96/192 kHz FL/FR</p>
9	<p>3840 x 2160p at 60Hz (16:9) [Native] 1920 x 1080p at 60Hz - HDTV (16:9, 1:1) 1920 x 1080p at 50Hz - HDTV (16:9, 1:1) 1920 x 1080i at 60Hz - HDTV (16:9, 1:1) 1920 x 1080i at 50Hz - HDTV (16:9, 1:1) 1920 x 1080p at 24Hz - HDTV (16:9, 1:1) 1920 x 1080p at 25Hz - HDTV (16:9, 1:1) 1920 x 1080p at 30Hz - HDTV (16:9, 1:1) 1280 x 720p at 60Hz - HDTV (16:9, 1:1) 1280 x 720p at 50Hz - HDTV (16:9, 1:1) 720 x 480p at 60Hz - EDTV (16:9, 32:27) 720 x 576p at 50Hz - EDTV (16:9, 64:45) 720 x 480i at 60Hz - Doublescan (16:9, 32:27)</p>

EDID Mode	Supported Features
9 (continued)	720 x 576i at 50Hz - Doublescan (16:9, 64:45) YCbCr 4:4:4, YCbCr 4:2:2 LPCM 2-channel, 16/20/24 bit depths at 32/44/48/88/96/176/192 kHz LPCM 6-channel, 16/20/24 bit depths at 32/44/48/88/96/176/192 kHz LPCM 8-channel, 16/20/24 bit depths at 32/44/48/88/96/176/192 kHz AC-3 6-channel, 640k max. bit rate at 32/44/48 kHz DTS 6-channel, 1536k max. bit rate at 44/48/88/96 kHz DD+ 8-channel at 44/48 kHz DVD-A 8-channel at 48/96/192 kHz DTS-HD 8-channel, 16-bit at 44/48/88/96/176/192 kHz FL/FR, FLFE, FC, RL/RR, RLC/RRC

Specifications

Video	
HD/SD	4096x2160@24/25/30/50/60Hz, 3840x2160@24/25/30/50/60Hz, 2048x1080p, 1080p@23.98/24/25/29.97/30/50/59.94/60Hz, 1080i@50/59.94/60Hz, 720p@50/59.94/60Hz, 576p, 576i, 480p, 480i
VESA	2560x1600, 2048x1536, 1920x1200, 1680x1050, 1600x1200, 1440x900, 1400x1050, 1366x768, 1360x768, 1280x1024, 1280x800, 1152x768, 1024x768, 800x600, 640x480
Color Space	YUV, RGB
Chroma Subsampling	4:4:4, 4:2:2, 4:2:0
Color Depth	8-bit, 10-bit, 12-bit

Audio	
Analog In	PCM 2Ch, LPCM 5.1, LPCM 7.1, Dolby® Digital, Dolby Digital Plus, Dolby TrueHD, DTS® 5.1, DTS-HD Master Audio™, DTS:X™, Dolby Atmos®
Sample Rate	32 kHz, 44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz, 176.4 kHz, 192 kHz
Bit Rate	24-bit (max.)

Resolution / Distance	4K/UHD - Feet / Meters		1080p - Feet / Meters	
HDMI @ 60 Hz	6	2	30	10
HDMI @ 24 Hz	16	5	50	15

Signal	
Bandwidth	18 Gbps
CEC	Yes
HDCP	2.2

Temperature	Fahrenheit	Celsius
Operating	32 to 122	0 to 50
Storage	-4 to 140	-20 to 60
Humidity (RH)	20% to 90%, non-condensing	

Power	
Consumption	6.5 W
Supply	Input: 100 - 240 V AC, 50/60 Hz Output: 5 V DC, 1 A

Dimensions	Inches	Millimeters
H x W x D	1.02 x 4.29 x 3.50	26 x 109 x 89
H x W x D (w/ ears)	1.02 x 5.00 x 3.74	26 x 127 x 95

Weight	Pounds	Kilograms
Device	0.6	0.27

Index

C

Connection

diagram 10

instructions 10

Contents

package 8

Customer support 3

D

DDC reclocking 16

Description

front / rear panel 9

E

EDID

dial 9, 11, 12

learning 12

modes 11, 17

pre-programmed 11

selecting 11

F

FCC statement 6

Features 8

FW / PWR

port 9, 10

H

HDMI IN 9, 10, 14

HDMI OUT 9, 10, 12, 14

HDP

LED 15

HPD

LED 9, 13

I

Installation 10

L

LEARN

button 9, 12, 13

LED

5V 9, 15

HDP 15

HPD 9

SINK 9, 15

SOURCE 9, 15

O

Operating notes 3

P

Panel descriptions 9

PWR

LED 9

S

Safety information 6

SINK

LED 9, 15

SOURCE

LED 15

Specifications 21

T

TEST

button 9, 14, 16

Testing

in-line 14

sink 16

source 16

W

Warranty 4

