




<b>DM SERIES DISPLAYS</b>	<b>PASSIVE DM55E</b>	<b>INTERACTIVE DM55E w/ OVERLAY</b>
<b>POWER CONSUMPTION - (Typical)</b>	65W	65W
<b>BEZEL (Top/Side, Bottom)</b>	9.5 / 15.0 mm	17.78 mm
<b>DIMENSIONS (WxHxD)</b>	48.4 x 27.8 x 2.0 in	50.2 x 29.4 x 2.6 in
<b>WEIGHT</b>	34.0 lbs	55.6 lbs
<b>KEY FEATURES</b>	Commercial Grade - 24 hour rated panel, Direct Lit LED BLU, Integrated speakers	
<b>VESA PATTERN</b>	400 * 400mm	
<b>WARRANTY</b>	3 Years On-Site (Parts / Labor / Backlight)	

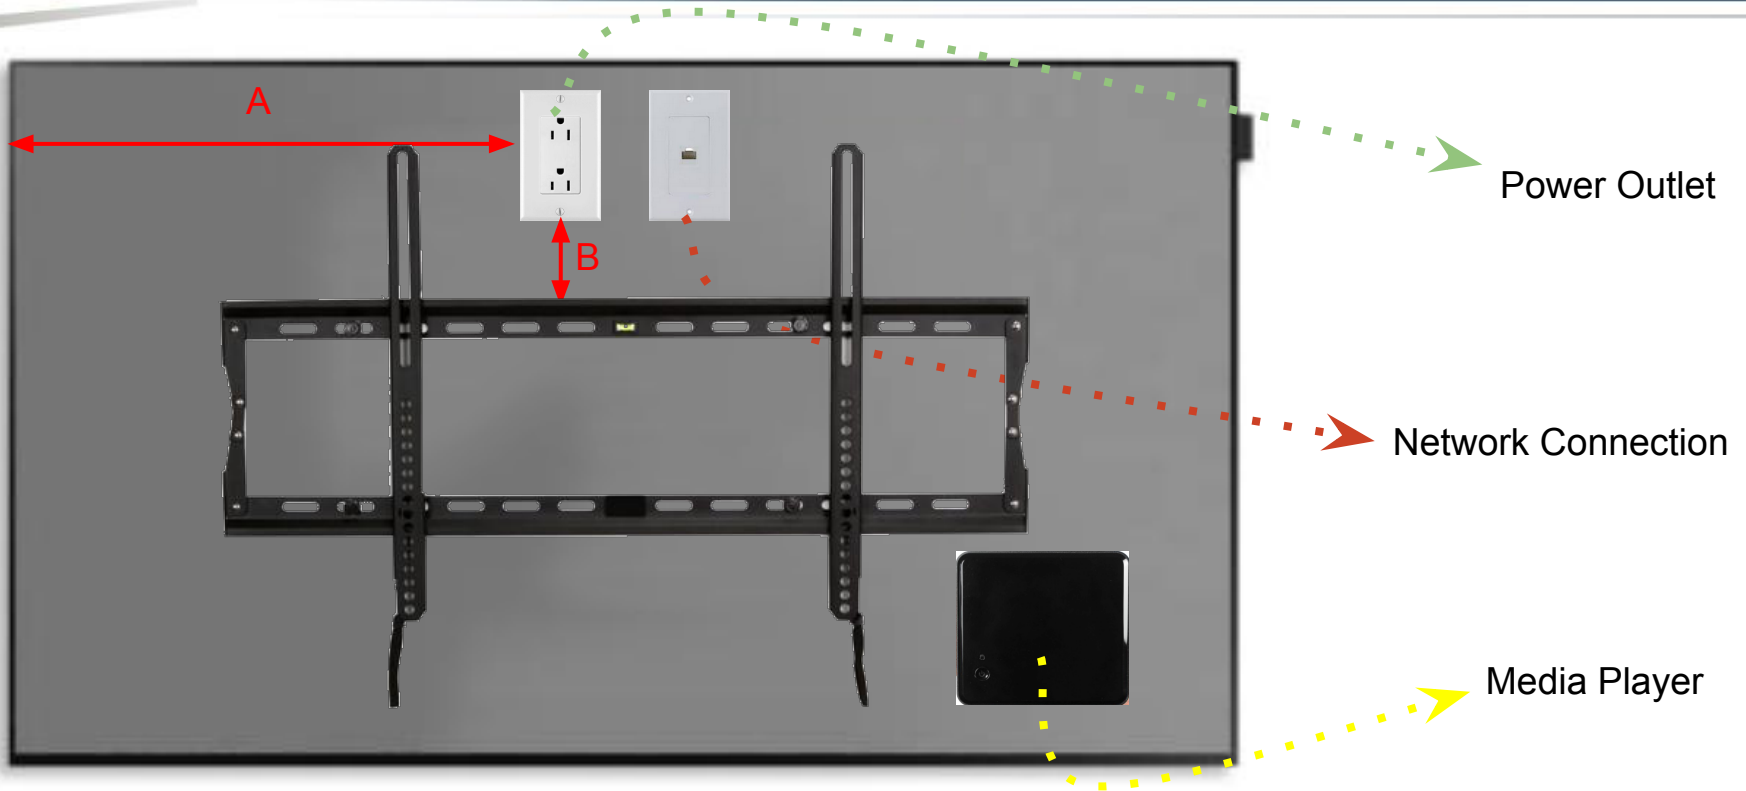

DM SERIES DISPLAYS	PASSIVE DM55E	INTERACTIVE DM55E w/ OVERLAY	OUTLET LOCATION	
			A	B
INSTALLED DIMENSIONS	48.4 x 27.8 x 3.8 in	50.2 x 29.4 x 4.4 in	21 in	2 in
<p><i>If installing on a recessed wall ensure proper ventilation is allowed per manufacturers requirements - 3 in for top/bottom/sides</i></p>				

<b>PROCESSOR</b>	Intel® Core i3 2.1GHz
<b>MEMORY</b>	4GB RAM
<b>HARD DRIVE</b>	64GB Solid State Drive
<b>GRAPHICS</b>	Intel® HD Graphics 5000
<b>WIRELESS</b>	Intel® Wireless 802.11 a/b/g/n
<b>NETWORK</b>	Gigabit Ethernet
<b>OS</b>	Windows 7 Embedded (pre configured with Rise Vision)
<b>I/O</b>	Mini HDMI @ 1, Mini DisplayPort @ 1, USB 3.0 @ 4
<b>DIMENSIONS</b>	4.5 x 4.4 x 1.4 in (HxWxD)
<b>POWER</b>	65W AC Adapter
<b>MOUNT</b>	VESA Bracket Included



Firewall Exceptions To function properly with the Rise Vision Player, a display must be able to access certain resources on port 80 (http), 443 (https) and 8041 (http).

Specifically, the following addresses need to be added to your firewall's exceptions list:

- rvashow2.appspot.com
- rvaserver2.appspot.com
- store.risevision.com
- commondatastorage.googleapis.com
- googleapis.com
- talkgadget.google.com
- connect.risevision.com
- s3.amazonaws.com
- p.jwpcdn.com/6/5/jwpsrv.js
- \*.rackcdn.com

