

ULTRA HOME CINEMA PROJECTION

HD29Darbee



BREATHTAKING COLOR. EXCEPTIONAL DEPTH. ASTOUNDING REALISM.



- Next Generation DarbeeVision Image Processor enhances images to reveal extraordinary levels of detail, depth, lighting, and object separation
- 1080p Full HD resolution, 3200 lumens and 30,000:1 contrast ratio deliver luminous images and profound black levels
- Reference Display Mode enables accurate color via REC.709 HDTV color gamut
- BrilliantColor dazzles with color enhancement while ISFccc profiles enable improved color purity and deeper blacks
- High performance and low maintenance with 8,000 hours of lamp life in ECO+ mode
- Power Optoma's optional WHD200 Wireless HDMI System with onboard USB power

Full 3D
1080p

Full 3D

Rec.709

DARBEE
VISUAL PRESENCE™

Short
Throw



The HD29Darbee is the successor to the WORLD'S FIRST home cinema projector featuring DarbeeVision, the HD28DSE. Engineered to deliver an immersive experience in Xbox One and PS4 games, Blu-ray movies, HDTV programming, home videos and even vacation photos. The integrated DarbeeVision™ image enhancement technology utilizes neuro-biologic algorithms to achieve unprecedented detail in skin tones, textures, and reflective surfaces while delivering superior depth, object separation and automatic removal of unsightly artifacts. The end result is an immersive, larger-than-life experience with Xbox One and PS4 games, Blu-ray movies, HDTV programming, and home videos and photos.

With 3200 lumens and an amazing 30,000:1 contrast ratio, HD29Darbee delivers bright images with deep black levels. HD29Darbee's Reference Display Mode enables accurate color via REC.709 HDTV color space for rich vibrant colors in Blu-ray movies, HDTV programming, home videos, and photos. With 8,000 hours of lamp life, the HD29Darbee requires very little maintenance, for hours of gaming and viewing entertainment.

The HD29Darbee features the latest digital media interface with support for MHL v1.2. MHL v1.2 enabled HDMI ports allow MHL devices such as Optoma's HDCast Pro*, Roku Streaming Stick and Smart Phones to connect directly to the projector to play back music and video, view pictures and even share webpages and other user generated digital media content.

CONNECTIVITY (May require optional accessories)



Computers



Smart
Phones



Tablets




3D Blu-ray/DVD Players



Game Console



Apple TV®



Chromecast™

ULTRA HOME CINEMA PROJECTION - HD29DARBEE

OPTICAL/TECHNICAL SPECIFICATIONS


| | |
|------------------------------------|---|
| Display Technology | Single 0.65" DC3 DMD DLP® Technology by Texas Instruments™ |
| Image Enhancement Processor | Integrated DarbeeVision™ Image Enhancement technology with Deep Color, 30-bit 4:4:4, split screen demo mode, slider demo mode, and 3 enhancement profiles (Hi-Def, Gaming & Full Pop) |
| Native Resolution | 1920x1080 Full HD |
| Maximum Resolution | 1920x1200 WUXGA |
| Brightness | 3200 Lumens |
| Contrast Ratio | 30,000:1 |
| Displayable Colors | 1.07 Billion |
| Lamp Life and Type* | 8000/6000/5000 (Dynamic/Eco/Bright) |
| Projection Method | Front, rear, ceiling mount, table top |
| Keystone Correction | ±40° Vertical |
| Uniformity | 80% |
| Offset | 116% |
| Aspect Ratio | 16.9 (Native), 16:10, 4:3, LBX, Auto |
| Throw Ratio | 1.48 ~ 1.62 D/W (+3% variance) |
| Image Size | 27.88" - 305.3" |
| Projection Distance | 59" - 394" |
| Projection Lens | F=2.5-2.67, f=21.9-24 mm, 1.1x manual zoom and focus |
| Optical Zoom | 1.1x |
| Digital Zoom | 0.8 ~ 2.0 |
| Audio | 10W Speaker |
| Noise Level | 29dB |
| Remote Control | Backlit IR remote control |
| Operating Temperature | 41 ~ 104°F |
| Power Supply | Auto-ranging: 100V ~ 240V ± 10%, 50-60Hz |
| Power Consumption | 240W Typical (Bright mode), 264W Max (Bright mode), 198W Typical (Eco mode), 218W Max (Eco mode) |
| High Altitude | Sea Level to 10,000 feet (@73°F); must manual switch to high altitude mode @5000 feet & above |

COMPATIBILITY SPECIFICATIONS

| | |
|-------------------------------|---|
| Computer Compatibility | WUXGA, UXGA, SXGA+, WXGA+, WXGA, SXGA, XGA, SVGA, VGA |
| Video Compatibility | NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p) |
| 3D Compatibility† | Supports all HDMI 1.4a mandatory 3D formats (Frame pack, side-by-side, top-bottom) and up converts frame rate from 60Hz to 120Hz or 24Hz to 144Hz (i.e 60 or 72 frames per eye). 3D glasses are needed and are sold separately. Refer to user manual for details. |
| Vertical Scan Rate | 24-85Hz, (120Hz for 3D) |
| Horizontal Scan Rate | 15.375-91.146KHz |
| User Controls | Complete on-screen menu, adjustments in 27 languages |
| I/O Connection Ports | 2x HDMI 1.4a with MHL (on port 1), 3D Sync Port, mini USB, USB-A (USB Power Only), 12V Trigger |
| Loop Through (Audio) | Yes |

PHYSICAL SPECIFICATIONS

| | |
|-------------------------------|--|
| Security | Kensington® lock, security bar and keypad lock |
| Weight | 5.1lbs |
| Dimensions (W x H x D) | 11.73" X 9.0" x 3.7" (W x D X H) |

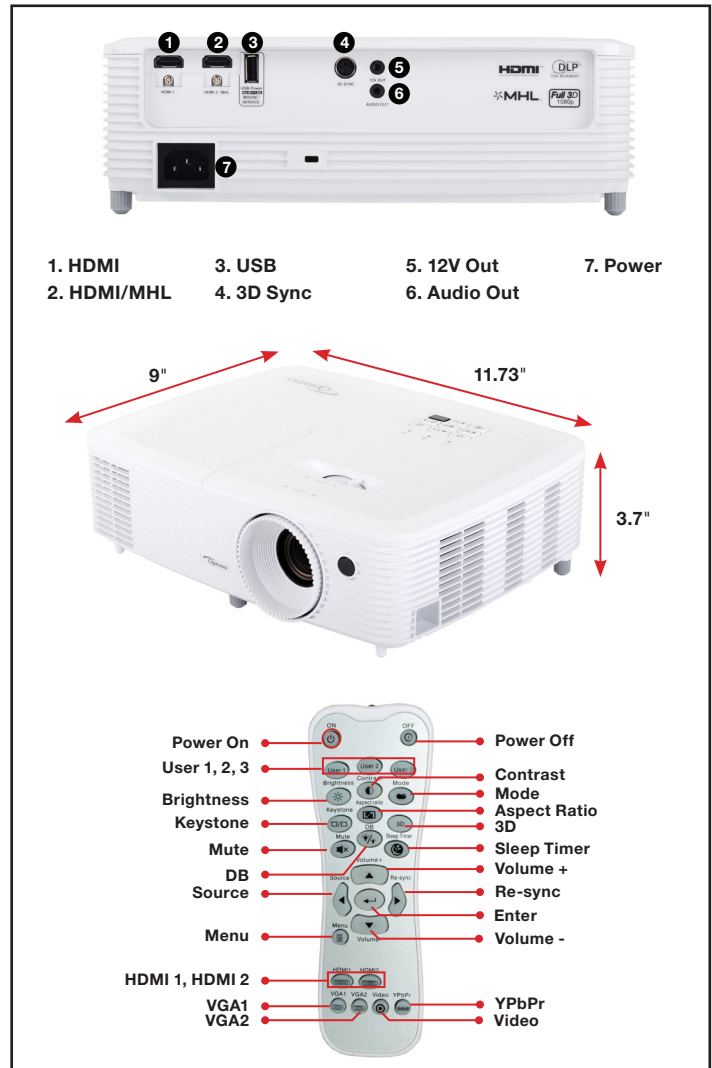

Warranty

1-Year Limited Parts and Labor, 90-Days on Lamp

What's in the Box (Standard Accessories)

HD29Darbee projector, lens cap, AC power cord, remote control, batteries for remote, multi-lingual CD-ROM, user's manual, quick start card, and warranty card

Optional Accessories

Universal ceiling mount, Wireless HDMI system, DLP® Link™ 3D glasses, RF 3D glasses, RF 3D emitter, Carrying case

Accessory Part Numbers

| | |
|------------------------------|------------------------------|
| Lamp: BL-FP195A | RF 3D emitter: BC300 |
| Remote: SP8ZE01GC01 | RF 3D glasses: ZF2300GLASSES |
| DLP® Link™ 3D glasses: ZD302 | Mount: BM-5001U |
| Carrying case: SP8VH03GC01 | |
| Wireless HDMI system: WHD200 | |

UPC 796435 81 256 0

*Lamp life is dependent on many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

†3D content can be viewed with DLP® Link active shutter glasses when projector is used with a compatible 3D player. Please visit www.OptomaUSA.com for more information.

www.OptomaUSA.com



Copyright © 2017 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time.