

CHORUS IC 706 V ST STEREO

Product specification sheet

Dual TNV Aluminum/Magnesium inverted dome tweeter


Rotating tweeter
Extended response at 28kHz
Very wide space dispersion

6.5" [165mm] Polyglass

woofer dual voice coil
Balanced and neutral bass
High power handling

Reinforced ABS frame, aluminum grille

Rigid structure
Can be painted

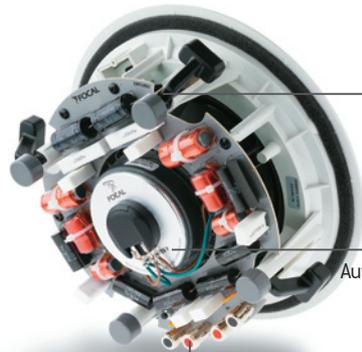

Quick fixing system

Easy mounting
Optional mounting kit

OPC Filtering
(Optimum Phase Crossover)

Phase optimum control
Wall Boost Control,
Automatic Polyswitch protection

Stereo dual input

Simultaneous reproduction
of the left and right information



- Stereo sound on one unique in-ceiling speaker
- Drivers developed and manufactured by Focal
- Sound quality and exceptional manufacturing at this price level

Type	2-way stereo In-Ceiling speaker
Drivers	6 ¹ / ₂ " [16.5cm] dual voice coil Polyglass midbass 1" [25mm] dual Al/Mg TNV rotating inverted dome tweeter
Frequency response (+/-3dB)	65Hz - 28kHz
Sensitivity (2.83V/1m)	89dB
Nominal impedance	2x8 Ohms
Protection	Autoreset Polyswitch fuse
Recommended amplifier power	25 - 120W
Crossover frequency	2 400Hz
Frame size (HxWxD)	Ø 10x3 ³ / ₄ " (Ø 253x96mm)
Cut-out dimensions (HxW)	Ø 8 ¹¹ / ₁₆ " [221mm]
Depth from wall	3 ⁷ / ₈ " [99mm]
Net weight	4.4lbs [2kg]

The IC 706 V ST is a stereo loudspeaker, with two tweeters and dual voice-coil woofer, perfect for small rooms (bathrooms, entrance hall...), without losing any information from the left and right channels on a unique speaker. Also recommended for the repetition of several identical emission sources, or as a simplified surround solution.



FOCAL
The Spirit of Sound