

Paging Horn Speaker

HS-30/30RT



FEATURES

- ❖ Excellent intelligibility & Loudness, High directivity, Good reliability.
- ❖ Adjust direction : Vertical 240°, Horizontal 160°.
- ❖ Units are commonly installed in commercial buildings, distribution centers, factories, schools, public areas, civic centers and recreational facilities.

SPECIFICATIONS

Spec	Model	Unit	HS-30	HS-30RT
Rated Input		W	30	30
Impedance		Ω	330, 660	330, 660
Frequency Response		Hz	380 ~ 6.5k	380 ~ 6.5k
SPL (1W/m)		dB	107	107
IP Ratings		IP	54	54
Operating Temperature, Dust and Humidity		°C	-45 ~ 50	-45 ~ 50
Weight		kg	2.85	2.95
		lb	6.3	6.5
Dimensions (W×H×D)		mm	ø280x350	320x210x365
		inches	ø11x13.7	12.6x8.2x14.3

* Specifications and design are subject to change without notice.


PAGING HORN SPEAKER

HS-30/30RT




Polar Pattern Diagram

▶ HS-30

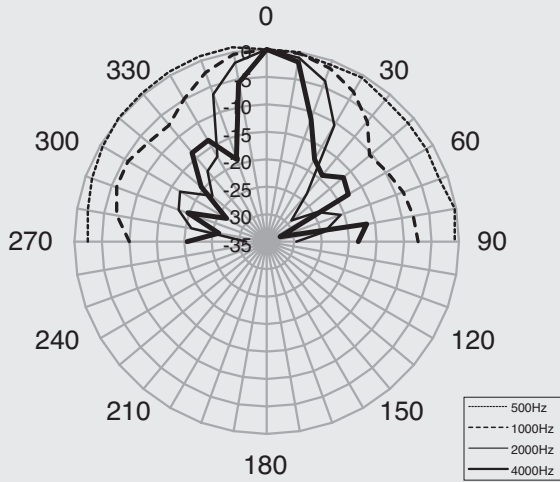


▶ HS-30RT

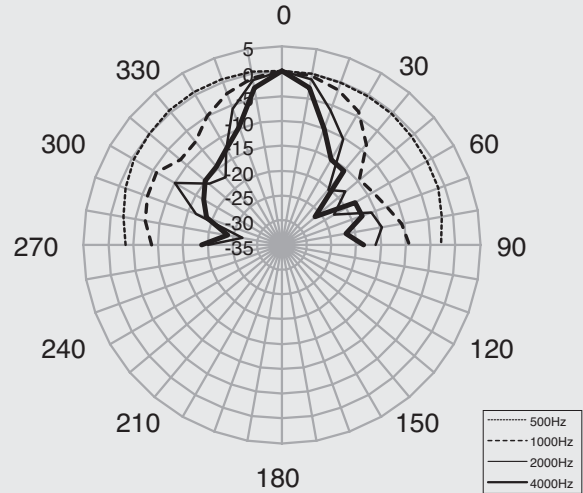


Frequency Response

▶ HS-30 SPL DATA

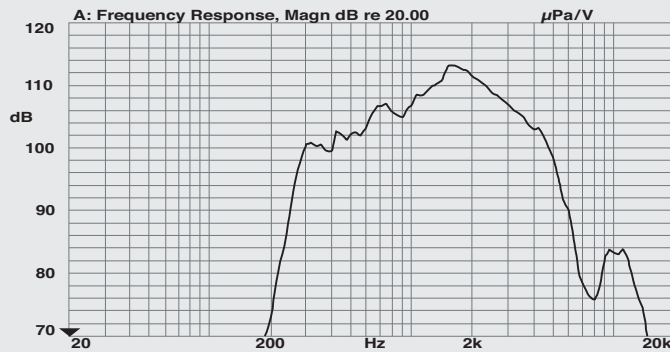

▶ HS-30RT SPL DATA

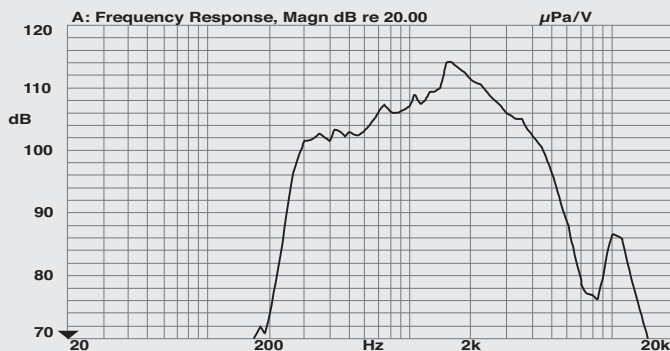

Inter-M Corporation

- OFFICE: 653-5 BANGHAK-DONG, DOBONG-KU, SEOUL, KOREA
 - TEL : +82-2-2289-8140~8, FAX : +82-2-2289-8149

- Home page: <http://www.inter-m.com>
 - E-mail: overseas@inter-m.com
 - Printed in Korea

