



**BenQ DLP Projector MW707**

**Feature High Light**

- \* 3,500 AL
- \* Zoom Ratio 1.3X
- \* Digital Zoom 0.75-2.0X
- \* Lamp Life 15,000 hrs
- \* LAN Control



**Display**

Projection System	DLP Single 0.65" WXGA
DMD type	DC3 DMD Chip
Native Resolution	1280x 800 pixels
Brightness	3,500 ANSI Lumens
Contrast Ratio*	10,000:1
Display Color	1.07 Billion Colors
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)
Light Source	Lamp
Light Source life*	5000/10000/15000 hours(Normal/Eco/SmartEco mode)

**Optical**

Throw Ratio	1.21~1.57
Zoom Ratio	1.3X
Lens Control	Fixed lens
Lens shift	N/A
Keystone Correction	Vertical: ± 40 degrees
Projection Offset	120%±5%
Projection Size	60"~180"

**Audio**

Built-in Speaker	10W x 1
------------------	---------

**Special Feature**

Security(防盜為主)	Security Bar
Feature	1D Keystone, HDMI/VGA Signal Power ON, LAN Control, Panel Key Lock

**Compatibility**

Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200)
Horizontal Frequency	15K ~ 102KHz
Vertical Scan Rate	23 ~ 120Hz
HDTV Compatibility	480i, 480p, 576i, 567p, 720p, 1080i, 1080p
Video Compatibility	NTSC, PAL, SECAM

**Power**

Power Consumption(Max/Normal/Eco)	Normal 265W
Standby Power Consumption	Normal < 0.5W. Network < 2W.
Power Supply	AC 100 to 240 V, 50/60 Hz

**Dimension and Weight**

Product Dimensions (WxHxD)	283 X 95 X 222mm
Product Weight	2 KG ± 100g

**Operation Condition**

Noise Level(Normal/Eco)	33/29 dBA
Operating Temperature	0 ~ 40°C

**Accessories**

Accessories (Standard)	Power Cord (1.8M) Remote control AAA Batteryx2 VGA cable (1.5M) User Manual CD (24L) Quick Start Guide (18L)
Accessories (Optional)	Replacement Lamp Spare Lamp Kit RS232 Cable 3D Glasses Universal Ceiling Mount

**OSD**

On Screen Display Language	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese / Vietnamese/ Persian (30 Languages)
----------------------------	--

**Environment Notice**


\*LightSource life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

\*All related Optical Value is measure by Standard Lens.

\* The Contrast is measure by Full On Full Off standard.



Connectivity


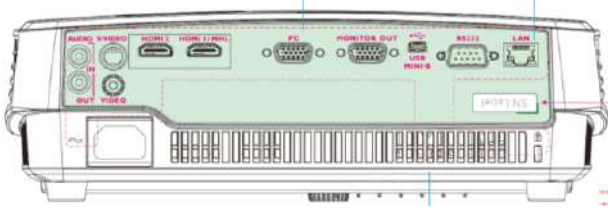


	Quantity		Quantity
1 Audio in (Mini Jack)	1	11 LAN	1
2 Audio out (Mini Jack)	1	12	
3 S-Video in (Mini DIN 4pin)	1	13	
4 Composite Video in (RCA)	1	14	
5 HDMI 2	1	15	
6 HDMI 1/MHL	1	16	
7 Computer in (D-sub 15pin)	1	17	
8 Monitor out (D-sub 15pin)	1	18	
9 USB (Type Mini B)	1	19	
10 RS232	1	20	


Dimension

Ceiling/Wall mount screw: M4  
(Max L = 25 mm; Min L = 20 mm)

283 mm (W) x 95 mm (H) x 222 mm (D)

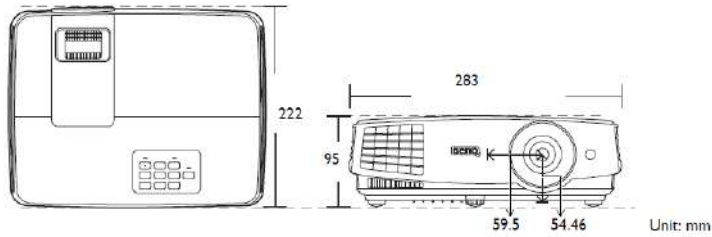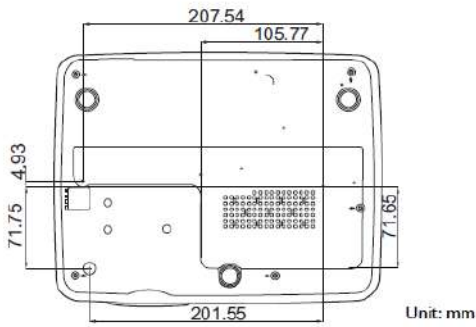

Installation

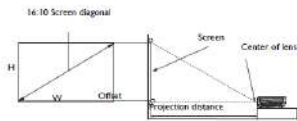

The screen aspect ratio is 16:10 and the projected picture is in a 16:10 aspect ratio

Screen size		Projection distance (mm)					
Diagonal		W (mm)	H (mm)	Min length (max. zoom)	Average	Max length (min. zoom)	Offset (mm)
Inch	mm						
60	1524	1292	808	1564	1756	2029	80.8
70	1778	1508	942	1824	2096	2367	94.2
80	2032	1723	1077	2085	2395	2705	107.7
90	2286	1938	1212	2346	2695	3044	121.2
100	2540	2154	1346	2606	2994	3382	134.6
110	2794	2369	1481	2867	3293	3720	148.1
120	3048	2585	1615	3128	3593	4058	161.5
130	3302	2800	1750	3388	3892	4396	175.0
140	3556	3016	1885	3649	4192	4734	188.5
150	3810	3231	2019	3909	4491	5073	201.9
160	4064	3446	2154	4170	4790	5411	215.4
170	4318	3662	2289	4431	5090	5749	228.9
180	4572	3877	2423	4691	5389	6087	242.3



Just Projectors, Unit 7, Campbell Court, Bramley Hampshire, RG26 5EG