




Version	Explain	Date
A		2014.12.09

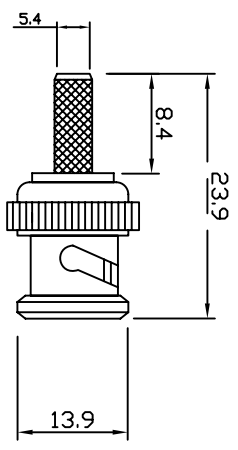

Technical parameters:

Working temperature: -55°C ~ 155°C

Relative humidity: ≤95% (40°C)

Main technical characteristics:

Frequency range: 0-4hz

Working voltage: 500v (50hz rms)

Standard retention: ≥0.25N

Pullout force: ≤20N

Contact resistance: ≤2.5mΩ

Insulation resistance: ≥5000mΩ

Standard withstanding voltage: 1500V (50hz rms)

Mechanical durability: 500 times



Elastic parts: beryllium bronze, gold-plated phosphor

bronze, silver plated

Inelastic parts: Nickel-plated brass

Insulating medium: PTFE

Sealing ring: silicone rubber



Application range: Low-power equipments, RG59 RG58 RG6U.
 Material:
 Pins: gold-plated copper
 Connecting pipes under pressure: Nickel-plated copper
 Main part: Nickel-plated alloy
 Inner diameter of outer conductor is 6.5mm (0.256in).
 Characteristic impedance is 50Ω and 75Ω.

general tolerance	CUSTOMER:	CUST NO:	DRAWING SIZE		
X	PRODUCT NO:	PART NO:	1:1	A1	
X.X	BNC three-piece suit	TT-RG91	UNIT	mm	
X.XX			CHECKED BY	PAGE	1 OF 1
X.XXX	DRAWN BY		APPREVED BY	SORTING NO.	

