biamp.

P60DT-BL

6.5" two-way, pendant loudspeaker, black




The P60DT 6.5" two-way, pendant loudspeaker brings an exceptional dispersion to areas and rooms with highceilings or large open spaces, while offering a clear speech and musical purity. Available in black and white, P60DT is suitable for a wide range of background and foreground sound applications. The dual Gripple[™] wire suspension system, euroblock in/out connector, loudspeaker cables and 70/100 volt power rotary with 16 ohms connectivity can be hidden after installation by the innovatively designed end-cap. The attractive aesthetics and ease-of-installation make this product an industry standard.

TECHNICAL SPECIFICATIONS

height in mm	265	width in mm	276
loudspeaker system	2-way	woofer size in inch	6.5
woofer cone material	coated paper	tweeter size in inch	1
mounting system	dual Gripple wire suspension system	100V transformer power taps in watts	60 - 30 - 15 - 7.5
70V transformer power taps in	60 - 30 - 15 - 7.5 - 3.75	impedance (ohms)	16
watts low impedance peak power in watts	240	low impedance RMS power in	60
		watts	
SPL 1W/1m in dB	91	max SPL 1m in dB	110
		main construction material	ABS plastic
frequency response in Hz	65 - 20K	IP rating	indoor use only
grille main material	steel	, , , , , , , , , , , , , , , , , , ,	,
Horizontal dispersion angle 1000 Hz	180°	Vertical dispersion angle 1000 Hz	180°
Net weight product (kg)	3.85		

biamp.

POLAR PLOTS

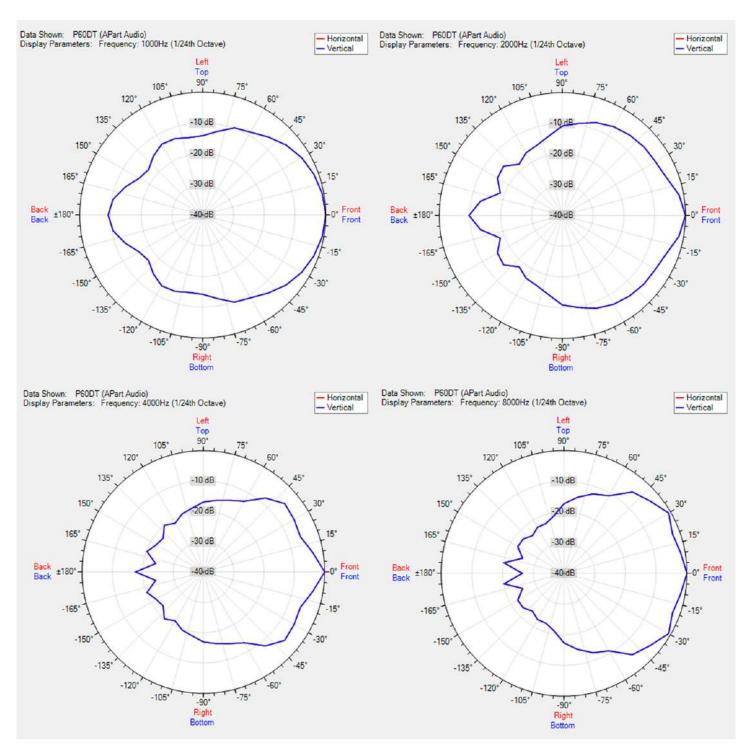

biamp.

MORE PICTURES

