

MP-WU5603 Introducing Our Very Latest SSL 3LCD Projector



Introducing our innovative 3LCD MP-WU5603 projector which combines all our technical expertise with our market leading knowledge.

This new, portable projector can produce 6,000 ANSI, has a 1,500,000:1 contrast ratio, a resolution of 1920 x 1200 and will provide 20,000 hours of maintenance-free operation.

So whatever the situation, our MP-WU5603 projector is the perfect solution for today's professionals. It combines simple usability with powerful performance in a lightweight and compact design, enabling users to set it up and get working in seconds.

Key Features:

WUXGA 1920 x 1200 resolution

6,000 ANSI lumens white / colour output

1,500,000:1 contrast ratio

Images up to 300" diagonal


Lens Shift and HDBase T

20,000 hrs / 5 year warranty (whichever comes first)

Please note: Content, technical specifications and images are subject to change. *For education and extended warranties please contact your local dealer.

Technical Specifications			
Panel Size	3LCD 16mm (0.64")	Security	Password/Myscreen Password, Pin Lock, Key Lock
Panel Structure	3LCD	On Screen Display Languages	English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkish, Arabian, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil), Indonesian, Vietnamese, Hebrew
Light Source	Laser	Languages	
Resolution	WUXGA (1920 x 1200)		
ht Output (Brightness) ANSI Lumens	6000 (Normal)		
Contrast Ratio	1,500,000:1	Digital Input	HDMI x 2 (HDCP1.4 compliant) HDBaseT x1
ight Source Life (Hours)	20,000	Analogue Input	15-pin Mini-D-Sub x 2, RCA Jack x 1
Number of colours	16.7 million colours	Video Output	15 pin Mini D-Sub x 1 (shared with analog computer input)
Lens	Built-in	Audio Input	3.5mm Stereo Mini Jack x 2, RCA Jack (L/R) x 1
Lens Zoom	Manual Zoom x 1.7	Audio Output	3.5mm Stereo Mini Jack x 1
Lens Shift	Manual Lens Shift	RS-232C Control	1 x 9-pin D-Sub
Lens Focus	Manual focus	Wireless LAN	USB-WL-5GM wireless adapter (optional)
Lens Shift	Vertical 0 – +56.5% / Horizontal +/-4.6%	Wired LAN	RJ45 connector x 1
Projection Lens F Number	1.6 - 2.1	USB- Type-A	USB Type A x 1 (wireless adapter)
Focus Distance	0.8-9.1 (Wide), 1.4-15.7 (Tele)	Power Supply	AC 100V – 120V / AC 220V – 240V (50/60Hz)
Distance to Width Ratio/Throw Ratio (:1)	1.4–2.4	Operating Power Consumption	400W
Diagonal Display Size	30 – 300"	Standby Power	Less than 0.5W
Installation	Ceiling, Tabletop, Rear, Portrait, 360° Projection	Consumption	
Speakers	16W mono	Weight	8.5Kg
Digital Keystone	Horizontal ± 30°, Vertical ± 30°	Dimensions (W x H X D)	506 x 136 x 424mm
Correction (Degrees)		Noise (Normal)	36dB (Normal), 27dB (Whisper)
Picture Modes	Standard, Natural, Cinema, Dynamic, Whiteboard, DICOM SIM, User-1, User-2, User-3	Filter Life (Hours)	20,000 Hours
Picture Adjustments	ASPECT selection (Normal/4:3/16:9/16:10/14:9/Zoom/ Native), Perfect Fit (4 corners and 4 sides), Frame Lock (Data signal with vertical frequency of 49 to 51Hz, 59 to 61Hz), HDCR, Image blank by RS232C/Remote control, Image optimizer, Magnify, Mirror reverse image, Up-side	Certification	CE Marking, EN61000-3-2, EN61000-3-3, EN55032 (Clas: A), EN55035 (EMC Directive), EN60950-1 (Low Voltage Directive), WEEE/RoHS compliant
		Computer	IBM Compatible VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, WSXGA+, UXGA, HD, WUXGA, MAC16"
Operating Features	down image Keystone V/H, PerfectFit, Standby audio, Audio pass through, Cloning function, Easy schedule setting, Auto power on.	Video	525i (480i), 525p (480p), 625i (576i), 625p (576p), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60), 4K (3840x2160@24/25/30 4:4:4, Com- pressed), 4K (4096x2160@24/25/30 4:4:4, Compressed)
Network Features	Wireless Capability(Option), Multi Projector, Moderator Control Mode, Projector Quick Connection (iOS / Android app), Projector Monitoring and Control from a Remote Lo- cation, E-mail Alerts, Add: present via Live Viewer Software (Windows/Mac)	Supplied Accessories	Power Cable (1.8m) x1, Computer Cable (2m) x1, IR Remote Control Unit x1, AA Batteries x2, Concise User Manual x1, Security Label x1, Lens Cover x1, HDMI Cable Holder x2, Cable Tie (large x1, medium x2), Hook Metal x1, Screw x1

3.5mm Stereo Mini Jack x 2, RCA Jack (L/R) x 1	
3.5mm Stereo Mini Jack x 1	
1 x 9-pin D-Sub	
USB-WL-5GM wireless adapter (optional)	
RJ45 connector x 1	
USB Type A x 1 (wireless adapter)	
AC 100V – 120V / AC 220V – 240V (50/60Hz)	
400W	
Less than 0.5W	
8.5Kg	
506 x 136 x 424mm	
36dB (Normal), 27dB (Whisper)	
20,000 Hours	
CE Marking, EN61000-3-2, EN61000-3-3, EN55032 (Class A), EN55035 (EMC Directive), EN60950-1 (Low Voltage Directive), WEEE/RoHS compliant	
IBM Compatible VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, WSXGA+, UXGA, HD, WUXGA, MAC16"	
525i (480i), 525p (480p), 625i (576i), 625p (576p), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60), 4K (3840x2160@24/25/30 4:4:4, Com- pressed), 4K (4096x2160@24/25/30 4:4:4, Compressed)	
Power Cable (1.8m) x1, Computer Cable (2m) x1, IR Remote Control Unit x1, AA Batteries x2, Concise User Manual x1, Security Label x1, Lens Cover x1, HDMI Cable Holder x2, Cable Tie (large x1, medium x2), Hook Metal x1, Screw x1	
USB wireless adaptor USB-WL-5GM	
UX43581/Lamp Free	
HL03037	
20,000 hours / 5 years (whichever comes first) (for extended warranties please contact your local dealer)	

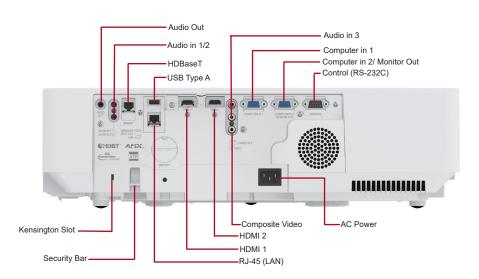

Dealer Stamp



Maxell Limited Whitebrook Park, Lower Cookham Road, Maidenhead, Berkshire SL6 8YA, Tel: +44 (0)1628 585 000 / Fax: +44 (0)1628 585 163 www.maxelldisplay.com