

Audio over CAT5 Extenders

- > Simple, reliable signal extension for stereo analog and S/PDIF digital audio signals
- > Extends signals up to 2000 ft (analog) using inexpensive CAT5 wire⁽¹⁾
- > Provides an audio return channel solution for Sonnex® and other multiroom audio systems
- > Professional quality audio performance
- > Completely passive — no power required
- > Surface mountable or attach to a single rack rail
- > Up to three units fit side-by-side on a 1U 19" rack shelf



The Crestron® AUD-EXT Series is a family of low-cost audio extenders designed for transporting analog and digital audio signals over several hundred feet using inexpensive CAT5 (or better) UTP cable. Four different AUD-EXT models are available, each consisting of one transmitter and one receiver. Models include:

- AUD-EXT-100 extends one unbalanced stereo audio signal up to 2000 ft (610 m)
- AUD-EXT-200 extends two unbalanced stereo audio signals up to 2000 ft (610 m)
- AUD-EXT-201 extends one unbalanced stereo audio signal and two S/PDIF audio signals up to 600 ft (183 m)
- AUD-EXT-202 extends two S/PDIF audio signals up to 600 ft (183 m)

Crestron Audio over CAT5 Extenders are ideal for use with a [Sonnex®](#) Multiroom Audio System to provide one or more audio return channels. An audio return channel allows an audio source located in any room of the house to be routed to any other room through the central audio distribution system.

Each AUD-EXT transmitter and receiver is designed to allow for mounting to a suitable flat surface or to a single rack rail in the back of an equipment rack. Three units can also fit neatly side-by-side on a standard 1U 19" rack shelf. AUD-EXT devices are completely passive, eliminating any extra cables or power supplies. Connecting a transmitter to its companion receiver requires just a single high-quality CAT5 (or better) UTP cable⁽¹⁾.

SPECIFICATIONS

Audio

Bandwidth: 20 Hz to 20 kHz
THD+N: <0.1% @ 20 Hz, 2 Vrms
S/N Ratio: >100 dB
Crosstalk: < -70 dB

Connections – Transmitters

AUDIO OUT: (1) 8-wire RJ45 female;
CAT5 audio balanced extension output;
Connects to the companion receiver AUDIO IN port⁽¹⁾

AUDIO IN CH1 (AUD-EXT-100 & 201 only): (1) pair RCA female;
Unbalanced stereo line-level audio input;
Input Impedance: 10k Ohms;
Maximum Output Level: 2 Vrms

AUDIO IN CH1 – CH2 (AUD-EXT-200 only): (2) pairs RCA female;
Unbalanced stereo line-level audio inputs;
Input Impedance: 10k Ohms;
Maximum Output Level: 2 Vrms

AUDIO IN SPDIF 1 – 2 (AUD-EXT-201 & 202 only): (2) RCA female;
S/PDIF coaxial digital audio inputs;
Input Impedance: 75 Ohms

Connections – Receivers

AUDIO IN: (1) 8-wire RJ45 female;
CAT5 balanced audio extension input;
Connects to the companion transmitter AUDIO OUT port⁽¹⁾

AUDIO OUT CH1 (AUD-EXT-100 & 201 only): (1) pair RCA female;
Unbalanced stereo line-level audio output;
Output Impedance: 100 Ohms;
Maximum Output Level: 2 Vrms

AUDIO OUT CH1 – CH2 (AUD-EXT-200 only): (2) pairs RCA female;
Unbalanced stereo line-level audio outputs;
Output Impedance: 100 Ohms;
Maximum Output Level: 2 Vrms

AUDIO OUT SPDIF 1 – 2 (AUD-EXT-201 & 202 only): (2) RCA female;
S/PDIF coaxial digital audio outputs;
Output Impedance: 75 Ohms

Environmental

Temperature: 41° to 122°F (5° to 50°C)
Humidity: 10% to 90% RH (non-condensing)

Enclosure

Chassis: Aluminum w/polycarbonate label overlay and (4) integral mounting flanges

AUD-EXT Audio over CAT5 Extenders

Mounting: Freestanding, surface mount, or attach to a single rack rail

Dimensions

Height: 1.68 in (43 mm)

Width: 5.12 in (131 mm)

Depth: 3.79 in (97 mm)

MODELS & ACCESSORIES

Available Models

AUD-EXT-100: Audio over CAT5 Extender for One Unbalanced Stereo Signal

AUD-EXT-200: Audio over CAT5 Extender for Two Unbalanced Stereo Signals

AUD-EXT-201: Audio over CAT5 Extender for One Unbalanced Stereo Signal & Two S/PDIF Signals

AUD-EXT-202: Audio over CAT5 Extender for Two S/PDIF Signals

Available Accessories

CBL Series: Crestron® Certified Interface Cables


Notes:

1. For connection between an AUD-EXT transmitter and receiver, use high-quality CAT5 (or better) unshielded twisted-pair cable. The maximum cable length is 2000 ft (610 m) for analog signals, and 600 ft (183 m) for digital signals. All wire and cables sold separately. AUD-EXT CAT5 signal extension technology is not compatible with Sonnex® Link, Crestron Home® (CH), DigitalMedia™ (DM®), or other CAT based signal extension technologies.

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/salesreps or by calling 800-237-2041.

The specific patents that cover Crestron products are listed online at: patents.crestron.com.

Crestron, the Crestron logo, Crestron Home, DigitalMedia, DM, and Sonnex are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. Specifications are subject to change without notice.
©2014 Crestron Electronics, Inc.

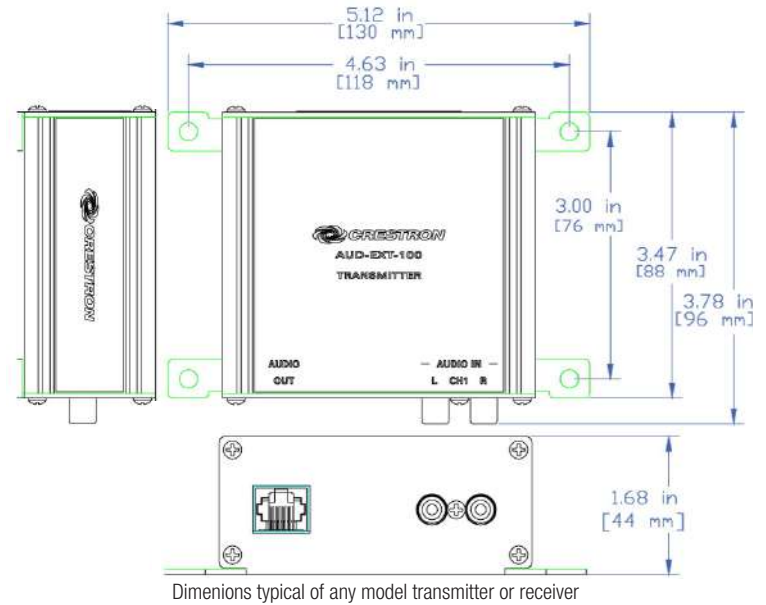

AUD-EXT-100

AUD-EXT-201



AUD-EXT-200

AUD-EXT-202